


Shedology 101

- A- Runner
- B- Rim Joist
- C- Floor Joist
- D- Flooring
- E- Wall Plate
- F- Wall Stud
- G- Girt
- H- Rafter
- I- Purlin
- J- Vent
- K- Doors

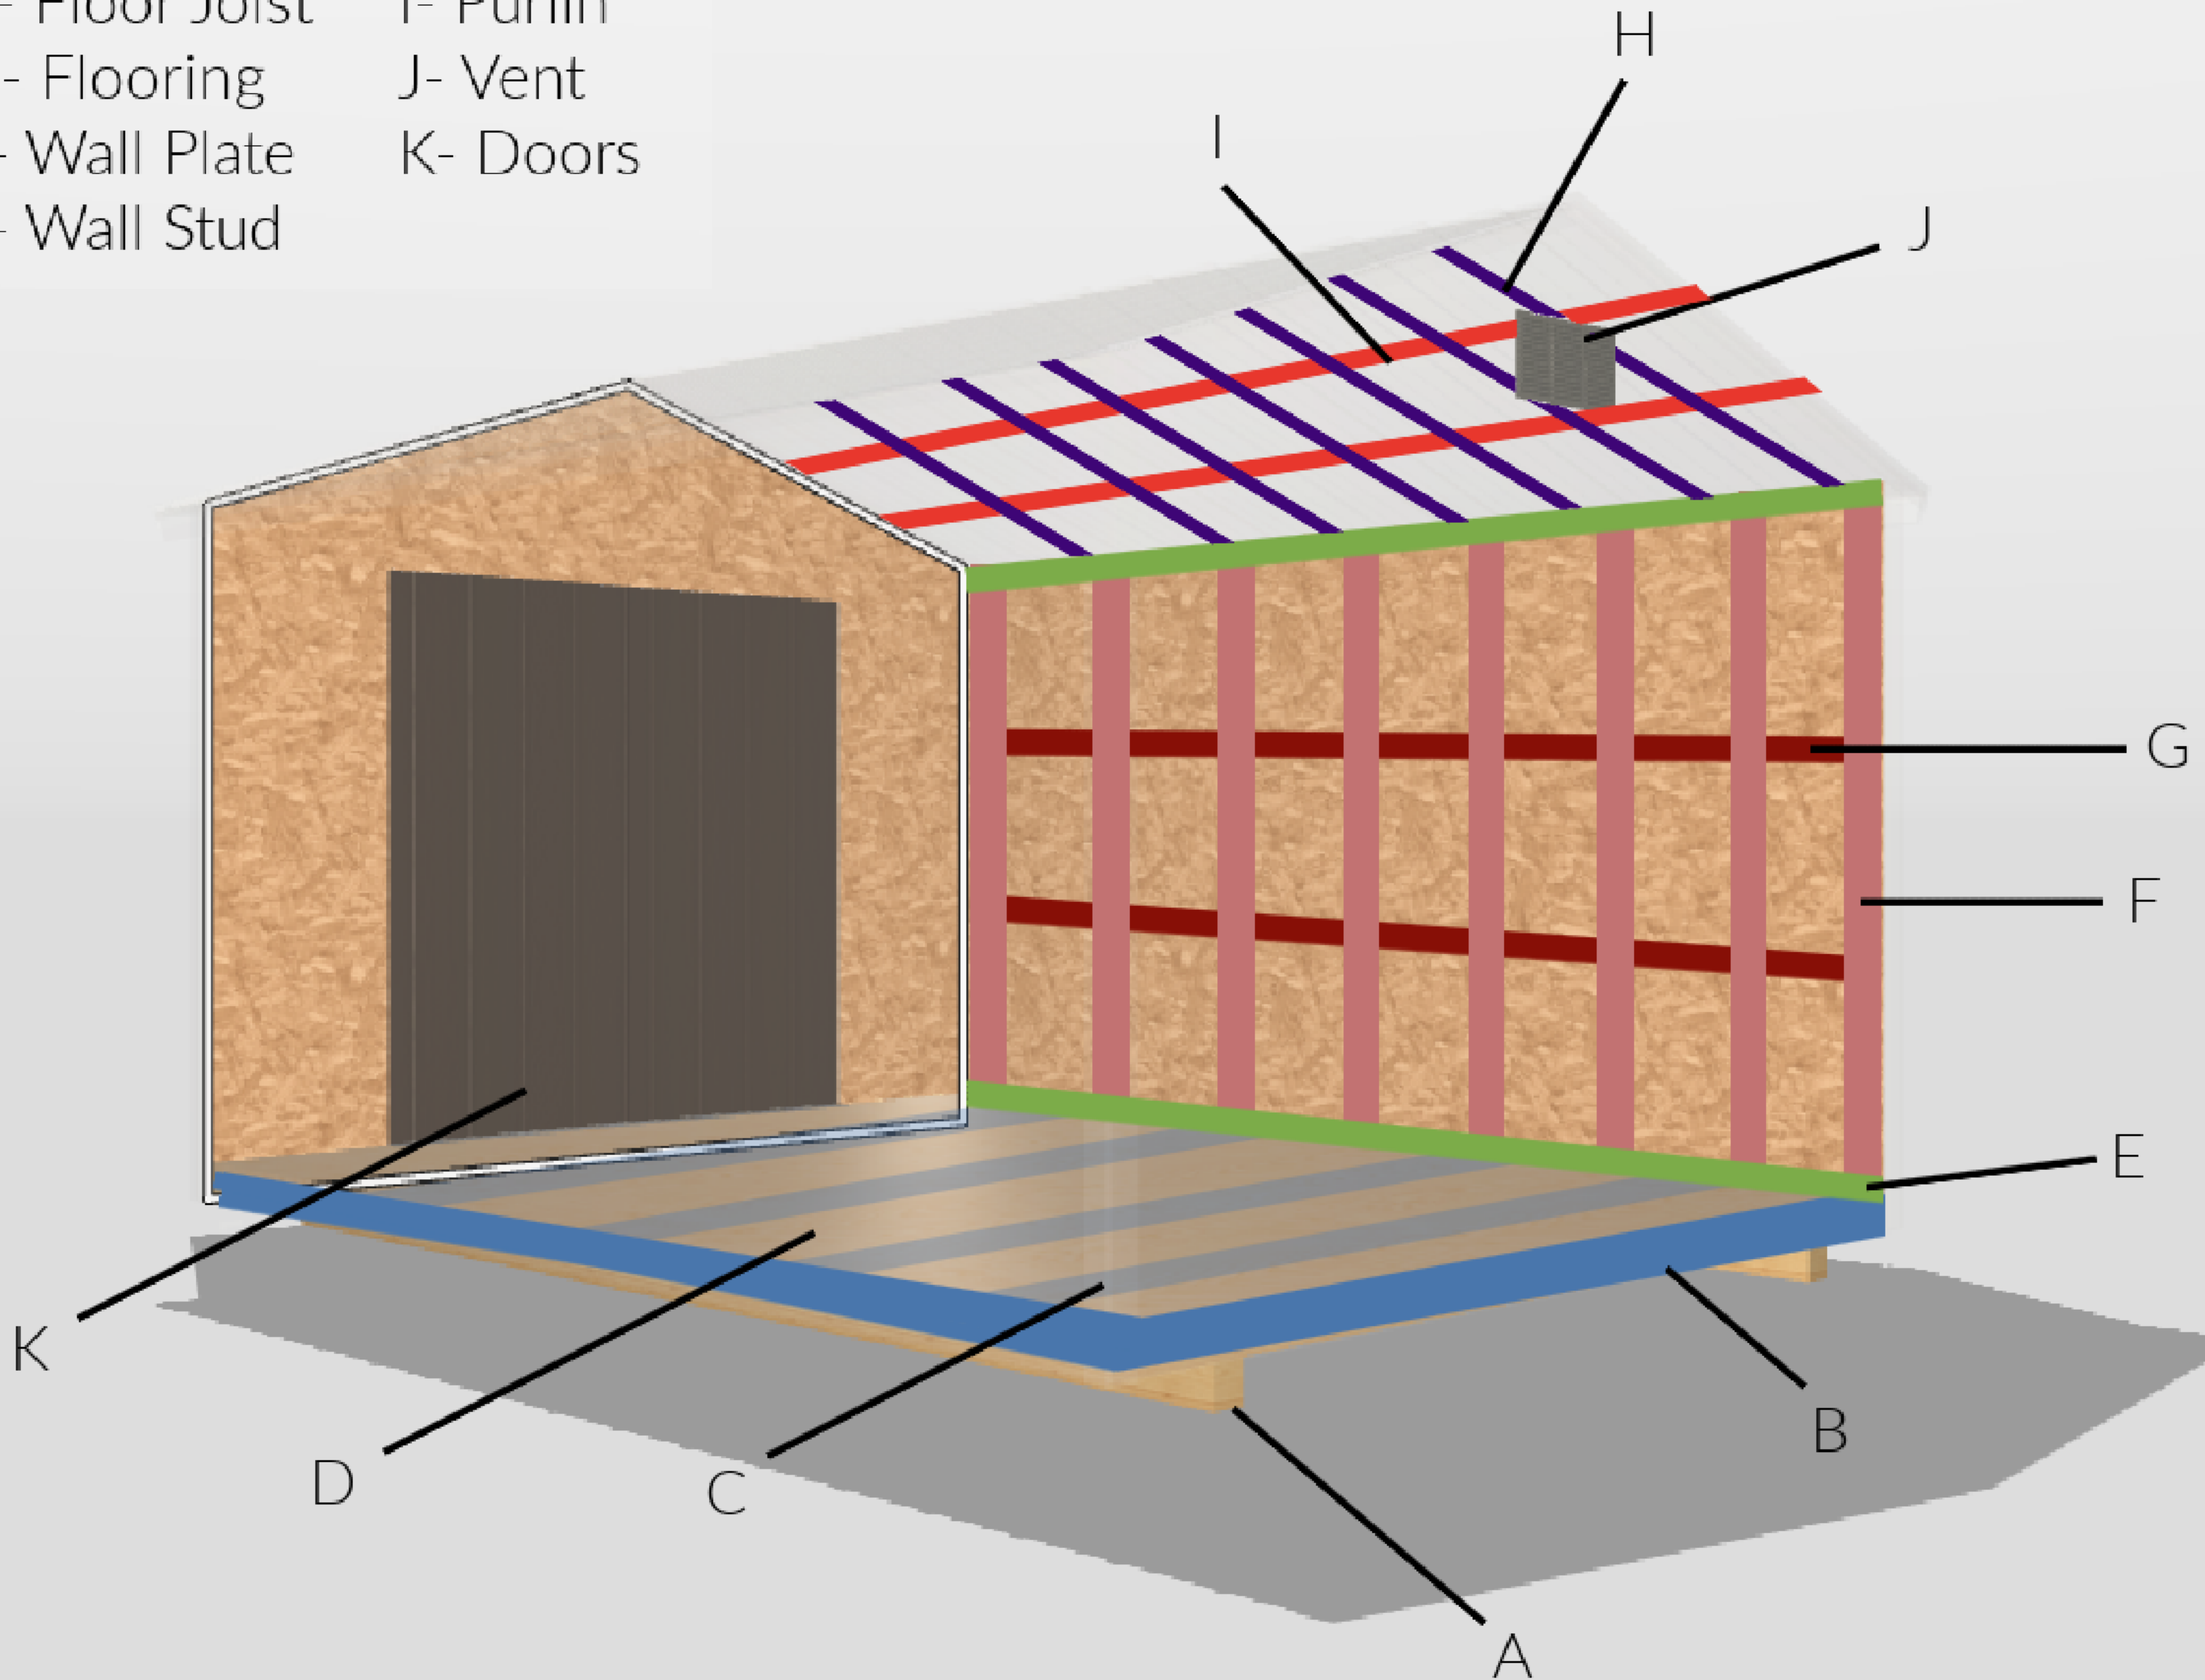

**This diagram shows commonly referred to components and does not show all components that may make up a building. This is a generic diagram and it is important to remember all builders/brands construct their buildings differently. If you have a question regarding a particular component please reach out to your local sales rep, check out the models additional specifications on our website, or call us (270) 789 - 4236.

Additional Specifications

Sloping Ridge - Metal Utility

Wall Specs	
Wall Height	6' 3"
Stud Type	2" x 4"
Stud Spacing	24" o.c
Siding	Central States, 29 gauge Panel-Loc Plus metal
Trim	Central States, 29 gauge metal
Sheathing	None
Vents	Building is constructed to vent air through the eaves.

Roof Specs	
Roof Pitch	4/12
Rafter Type	2" x 4"
Rafter Spacing	48" o.c
Roof Type	Central States, 29 gauge Panel-Loc Plus metal
Sheathing	Single bubble insulation

Floor Specs	
Joist Type	2" x 4"
Joist Spacing	16" o.c
Flooring	5/8" LP ProStruct Tongue and Groove flooring with SmartFinish
Runners	4" x 6" Pressure treated runners, notched
Runner #	10' Wide - 2 runners 12' & 14' wide - 4 runners *See standard features for more info



Additional Specifications

Sloping Ridge - Metal Utility


Door Specs	
Standard Door	6' Double doors
Door Opening	Width - 70" Height - Approximately 79.5"
Threshold	Heavy duty aluminum diamond plate

Standard Features	
If double doors are moved from front to side of building on 10' wide, building will need to be upgraded to have a third runner on the same side as double doors.	



DO NOT USE THIS DIGITAL COLOR CHART FOR COLOR MATCHING.

This digital color chart is intended to be viewed on computer monitors to show a wide range of colors available. Colors will vary depending on your computer monitor and monitor settings. Please ask for a physical color chart to view colors, and a metal sample for color matching purposes.

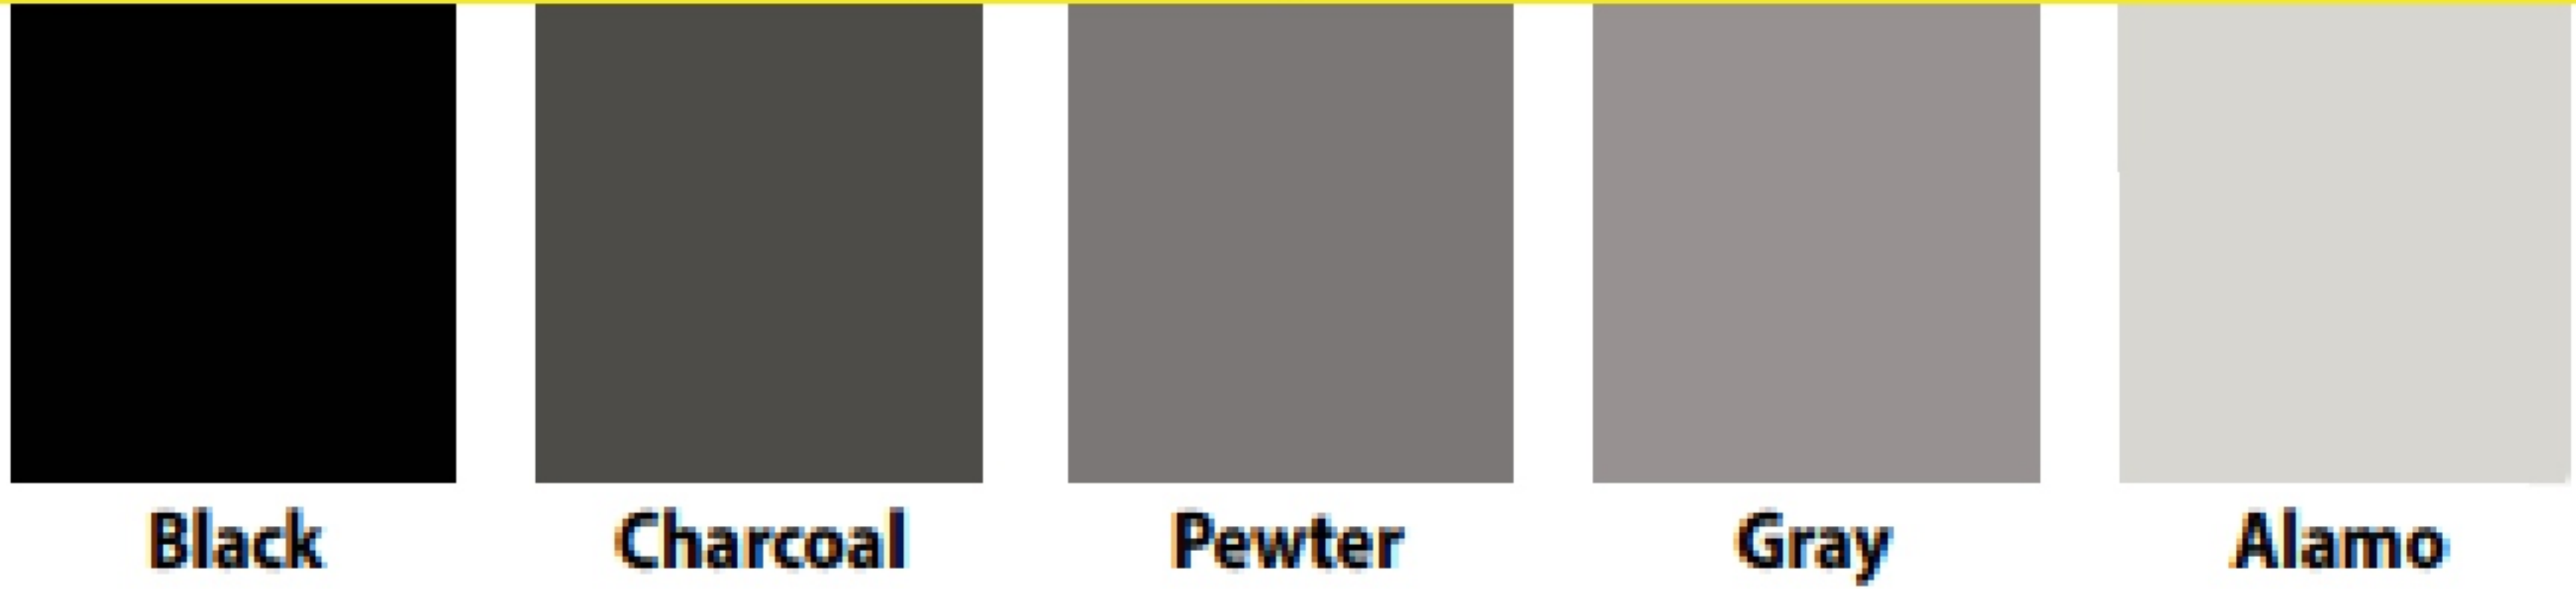

Panel-Loc Plus™

Color Selection Tool



	PRIME CentralGuard
FADE PROTECTION	LIFETIME
Paint Warranty	THICKER 1.0 mil
Paint Thickness	30-YEAR
Fade Warranty	✓✓
Fade Protection	
RUST BLOCKING	✓
Advanced Rust Blocking	20-YEAR
Perforation Warranty	1.60 mil
Substrate Thickness	Galvalume
Substrate Coating	
DENT RESISTANCE	✓
Advanced Dent Resistance	THICK
Steel Thickness	29 ga.
Steel Gauge	



Clear acrylic coating
Galvalume® **Burnished Slate** **Brown** **Tan**

